



- VALUES SHOWN ARE NOMINAL AND NOT TO BE USED FOR INSTALLATION PURPOSES.
- DRAWINGS ARE NOT TO SCALE.
- CHECK WITH LOCAL BUILDING CODES AND OBTAIN ALL NECESSARY BUILDING PERMITS.
- THESE ARE BASIC AND GENERAL SPECIFICATIONS AND DO NOT COVER ALL POSSIBLE INSTALLATION SCENARIOS.

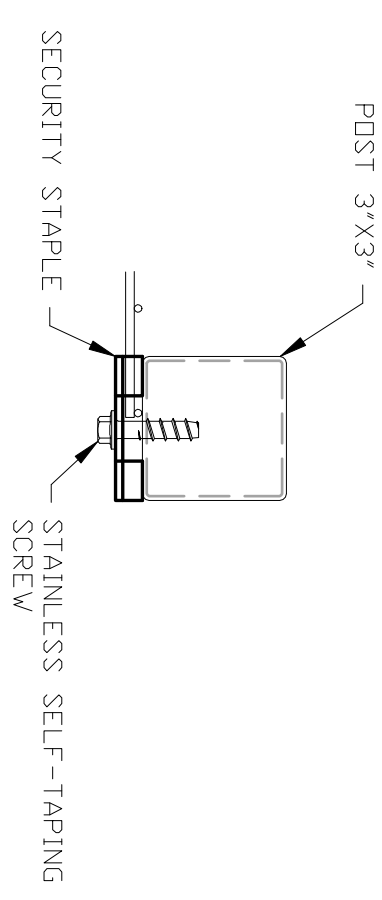

SECTION 1 - "UNIVERSAL CLAMP"

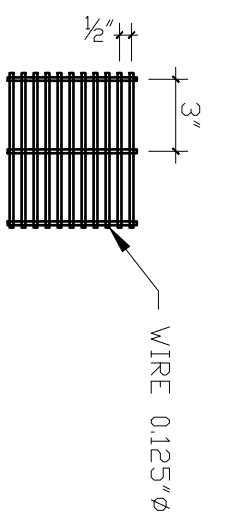

DETAIL 1

FORTE FLAT PANEL SPECIFICATIONS		SPECIFICATION		NOTES
SPECIFICATION	TOLERANCE	SPECIFICATION		
HORIZONTAL WIRE DIAMETER	0.125"/3.2mm.	±0.0019"/±0.05mm.	ASTM A-510	
VERTICAL WIRE DIAMETER	0.125"/3.2mm.	±0.0019"/±0.05mm.	ASTM A-510	
TENSILE STRENGTH	80 ksi			
ZINC COATING	0.32 oz./ft ²		ASTM A-641	
POWDER COATING THICKNESS	TGC FREE/VOC FREE	100 MICRONS	ASTM D-7091	


DMF POST SPECIFICATIONS		SPECIFICATIONS		NOTES
DIMENSION		SPECIFICATIONS		
POST SIZE	3"x3"			
POST GAUGE	11	ASTM A513		
TENSILE STRENGTH	44945 lbs./in ²	ASTM A-500		
POST ZINC COATING	0.90oz./ft ²	ASTM A-653 TABLE 1 (G90=2275)		
YIELD STRENGTH	32997 lbs./in ²	ASTM A-500		
POST CAP	PLASTIC INJECTION FOR 3"x3" POST	POLYPROPYLENE		
HARDWARE CLAMPS	UNIVERSAL CLAMP			
POWDER COATING THICKNESS	100 MICRONS	TGC FREE/VOC FREE	ASTM D-7091	

DRAWINGS BY:
VP & ASSOCIATES, INC.
200 S. GULF BLVD.
TAMPA, FL 33605
PH: 813-247-3835
FAX: 813-247-4305

DATE: APRIL, 2018

DMF – FORTE FLAT PANEL 142"
ELEVATIONS/SECTIONS

PROJECT NAME:	GENERAL SPECS
CUSTOMER:	DESIGN MASTER FENCE

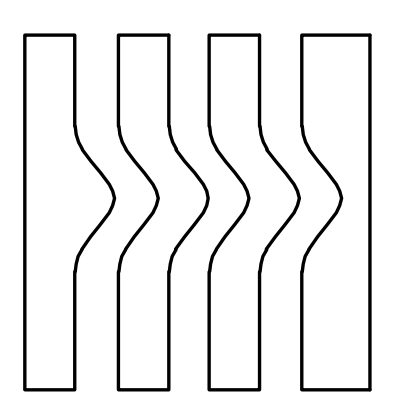

Designmaster™
FENCING SYSTEM