


- VALUES SHOWN ARE NOMINAL AND NOT TO BE USED FOR INSTALLATION PURPOSES.
- DRAWINGS ARE NOT TO SCALE.
- CHECK WITH LOCAL BUILDING CODES AND OBTAIN ALL NECESSARY BUILDING PERMITS.
- THESE ARE BASIC AND GENERAL SPECIFICATIONS AND DO NOT COVER ALL POSSIBLE INSTALLATION SCENARIOS.

FORTE FLAT PANEL SPECIFICATIONS			
SPECIFICATION	TOLERANCE	SPECIFICATION	NOTES
HORIZONTAL WIRE DIAMETER	0.144"/3.65mm.	±0.0019"/±0.05mm.	ASTM A-510
VERTICAL WIRE DIAMETER	0.144"/3.65mm.	±0.0019"/±0.05mm.	ASTM A-510
TENSILE STRENGTH	80 ksi		
ZINC COATING	0.32 oz/ft ²		ASTM A-641
POWDER COATING THICKNESS	TIC FREE/VOC FREE	100 MICRONS	ASTM D-7091

DMF- POST SPECIFICATIONS			NOTES
DIMENSION	SPECIFICATIONS		
POST SIZE	3"x3"	ASTM A513	
POST GAUGE	11		
TENSILE STRENGTH	44945 lbs/in ²	ASTM A-500	
POST ZINC COATING	0.96oz/ft ²	ASTM A-653 TABLE 1 (G90=Z275)	
YIELD STRENGTH	32997 lbs/in ²	ASTM A-500	
POST CAP	PLASTIC INJECTION FOR 3"x3" POST	POLYPROPYLENE	
HARDWARE CLAMPS	UNIVERSAL CLAMP		
POWDER COATING THICKNESS	100 MICRONS	TIC FREE/VOC FREE	ASTM D-7091

DATE: OCTOBER, 2018		DMF – FORTE FLAT PANEL 99” ELEVATIONS/SECTIONS	
PROJECT NAME:	GENERAL SPECS	CUSTOMER:	DESIGN MASTER FENCE

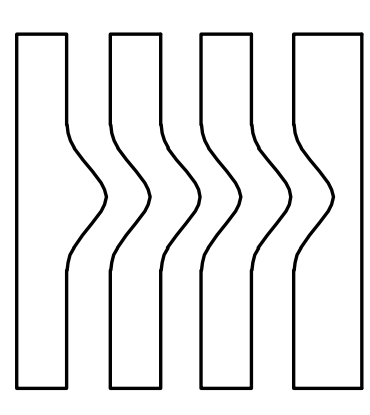

Designmaster™
FENCING SYSTEM

DRAWINGS BY:
VP & ASSOCIATES, INC.
202 S. 22ND ST.
TAMPA, FL 33605
PH: 813-247-3835
FAX: 813-247-4305