



- VALUES SHOWN ARE NOMINAL AND NOT TO BE USED FOR INSTALLATION PURPOSES.
- DRAWINGS ARE NOT TO SCALE.
- CHECK WITH LOCAL BUILDING CODES AND OBTAIN ALL NECESSARY BUILDING PERMITS.
- THESE ARE BASIC AND GENERAL SPECIFICATIONS AND DO NOT COVER ALL POSSIBLE INSTALLATION SCENARIOS.
- PANEL MAY BE INSTALLED WITH THE TINES POINTING UP OR DOWN.

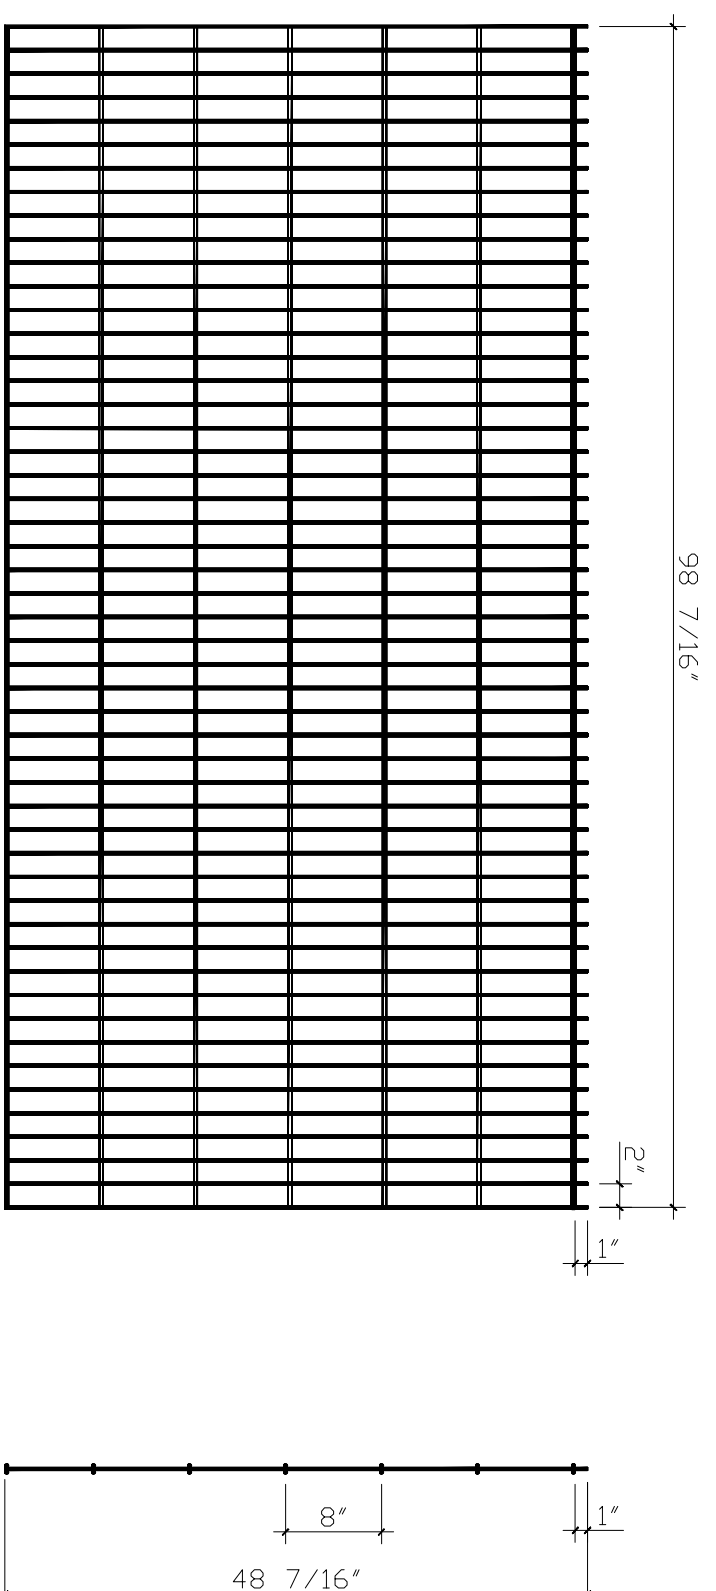


DMF CONTEMPO 868 PANEL SPECIFICATIONS		
SPECIFICATION	TOLERANCE	SPECIFICATION
HORIZONTAL WIRE DIAMETER	±0.0019"/±0.05mm	ASTM A-510
VERTICAL WIRE DIAMETER	±0.0019"/±0.05mm	ASTM A-510
TENSILE STRENGTH	90 ksi	
ZINC COATING	0.32 oz/ft ²	ASTM A-641
POWDER COATING THICKNESS	TOIC FREE/VOC FREE	100 MICRONS
		ASTM D-7091

DMF POST SPECIFICATIONS		
DIMENSION	SPECIFICATION	NOTES
POST SIZE	3"x3"	ASTM A-513
POST GAUGE	11	
TENSILE STRENGTH	44945 lbs/in ²	ASTM A-500
POST ZINC COATING	0.90oz/ft ²	ASTM A-653, TABLE 1 (990=Z275)
YIELD STRENGTH	32997 lbs/in ²	ASTM A-500
POST CAP	PLASTIC INJECTION FOR 3"x3" POST	POLYPROPYLENE
HARDWARE CLAMPS	CLAM SHELL	ELECTROGALVANIZED STEEL
POWDER COATING THICKNESS	100 MICRONS	TOIC FREE/VOC FREE
		ASTM D-7091


DMF POST SPECIFICATIONS (ALTERNATE)		
DIMENSION	SPECIFICATION	NOTES
POST SIZE	3"x3"	ASTM A-513
POST GAUGE	11	
TENSILE STRENGTH	44945 lbs/in ²	ASTM A-500
POST ZINC COATING	0.90oz/ft ²	ASTM A-653, TABLE 1 (990=Z275)
YIELD STRENGTH	32997 lbs/in ²	ASTM A-500
POST CAP	PLASTIC INJECTION FOR 3"x3" POST	POLYPROPYLENE
HARDWARE CLAMPS	UNIVERSAL CLAMP	ELECTROGALVANIZED STEEL
POWDER COATING THICKNESS	100 MICRONS	TOIC FREE/VOC FREE
		ASTM D-7091

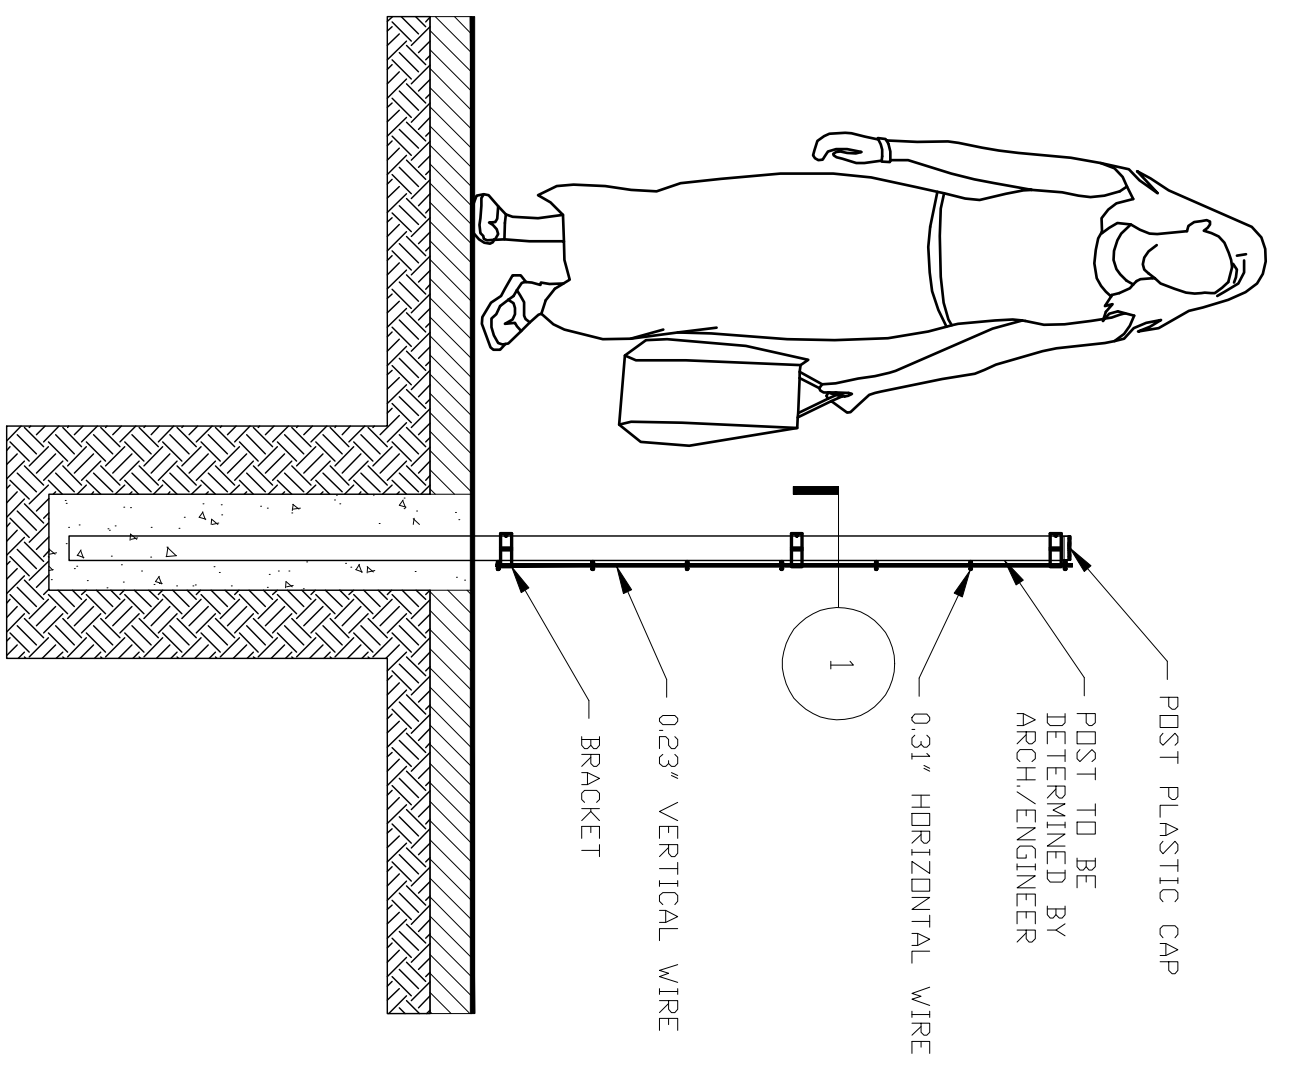

SECTION 1 - 'CLAM SHELL' BRACKET

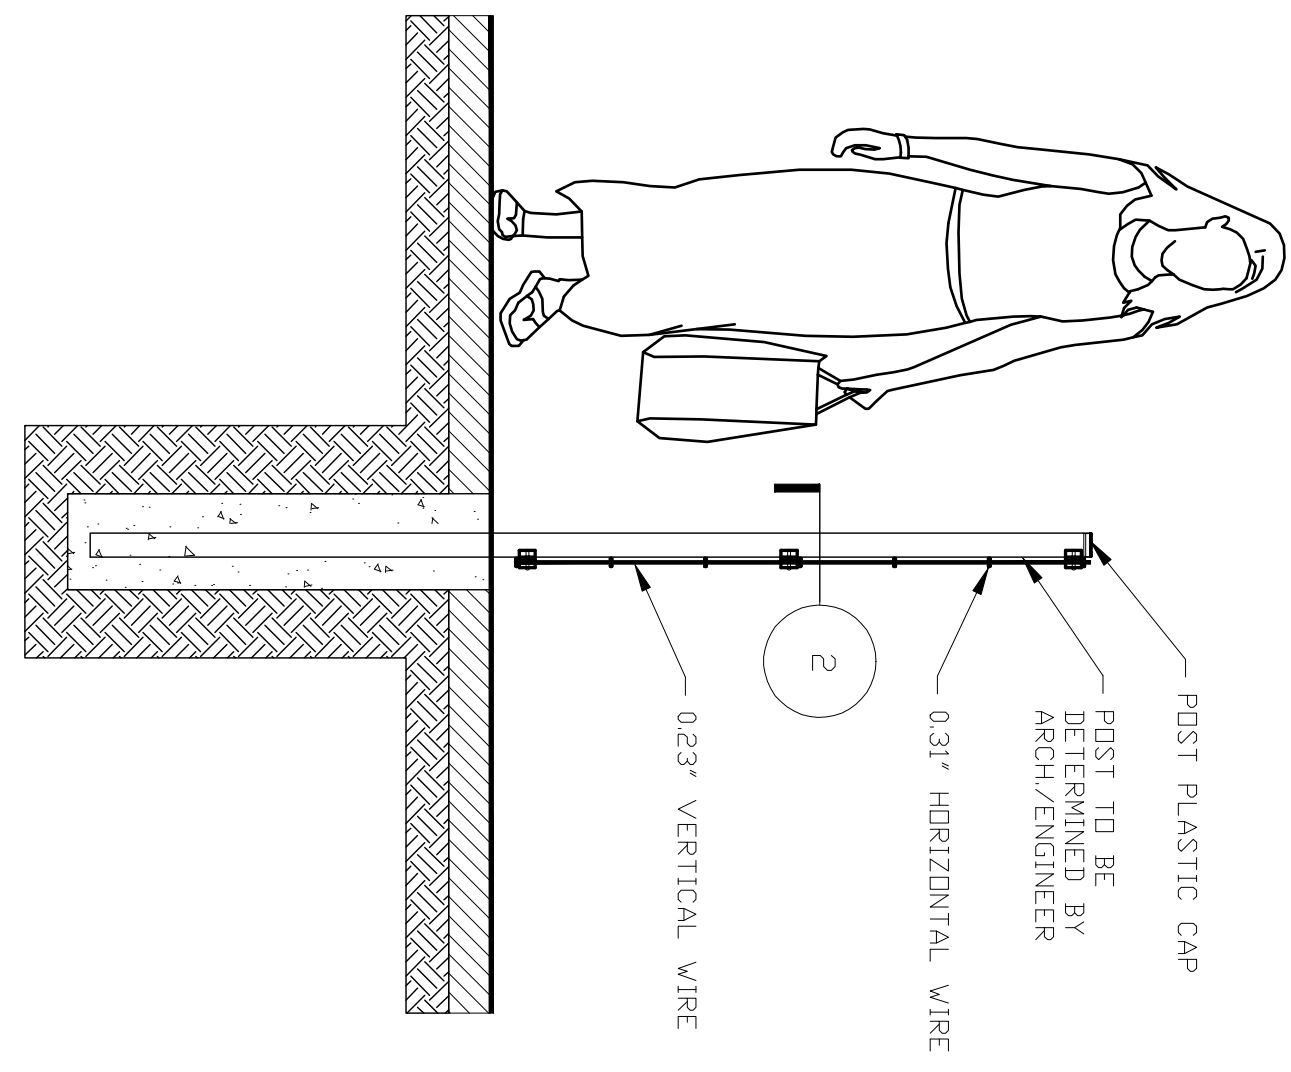

SECTION 2 - 'UNIVERSAL CLAMP'

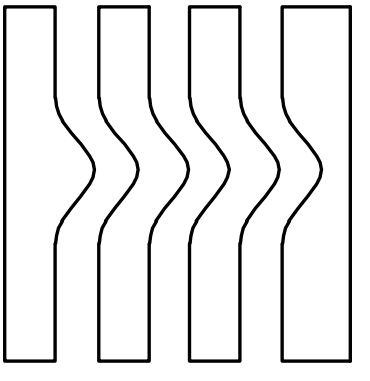

Designmaster™
FENCING SYSTEM

DMF - CONTEMPO 4'-0"
ELEVATIONS/SECTIONS

PROJECT NAME:	GENERAL SPECS
CUSTOMER:	DESIGN MASTER FENCE

DATE: APRIL, 2018

DRAWINGS BY:
VP ASSOCIATES, INC.
20 ASSOCIATES ST.
TAMPA, FL 33605
PH: 813-247-3835
FAX: 813-247-4305