
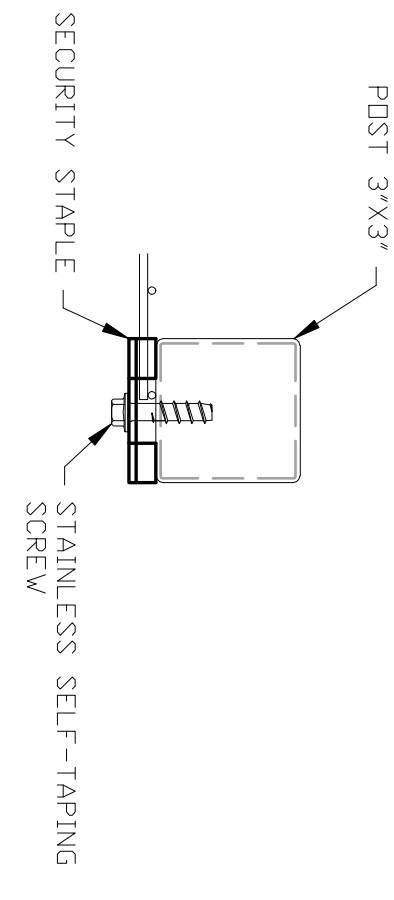
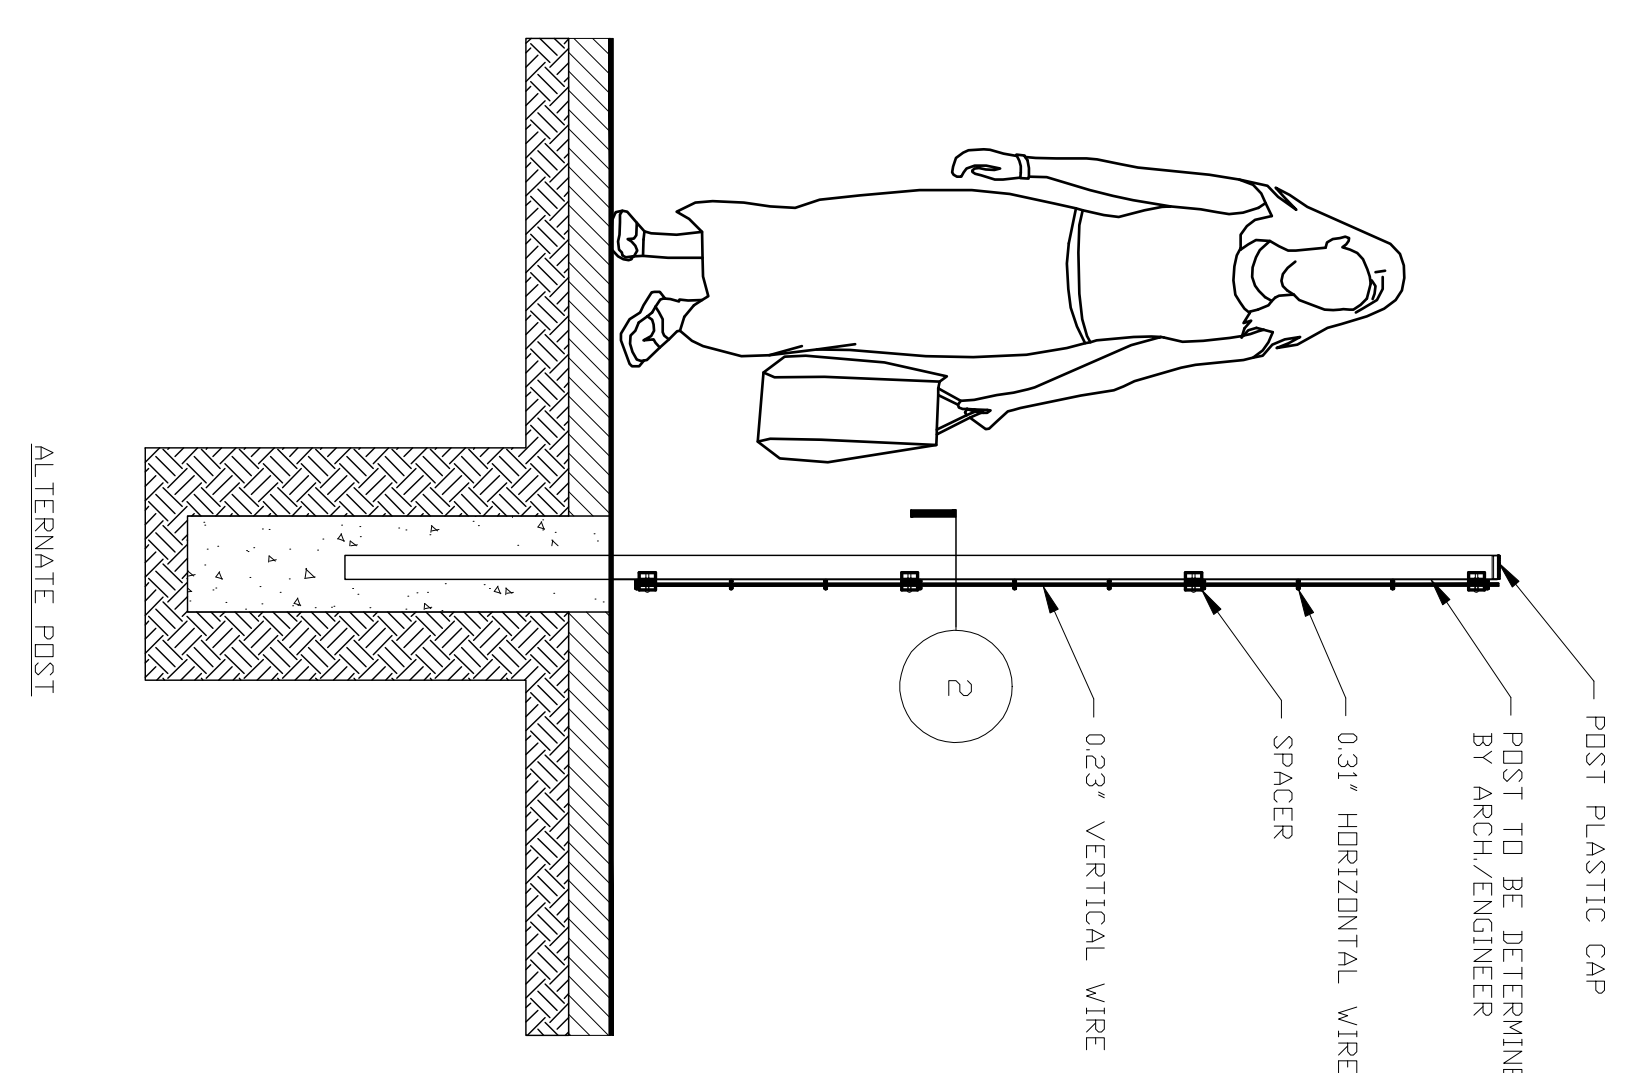
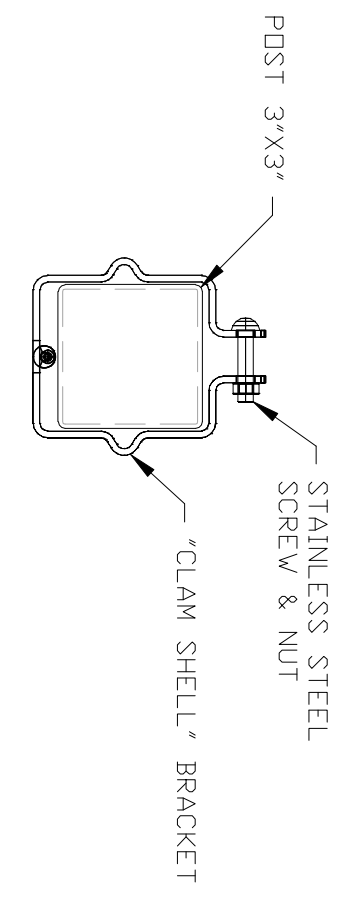
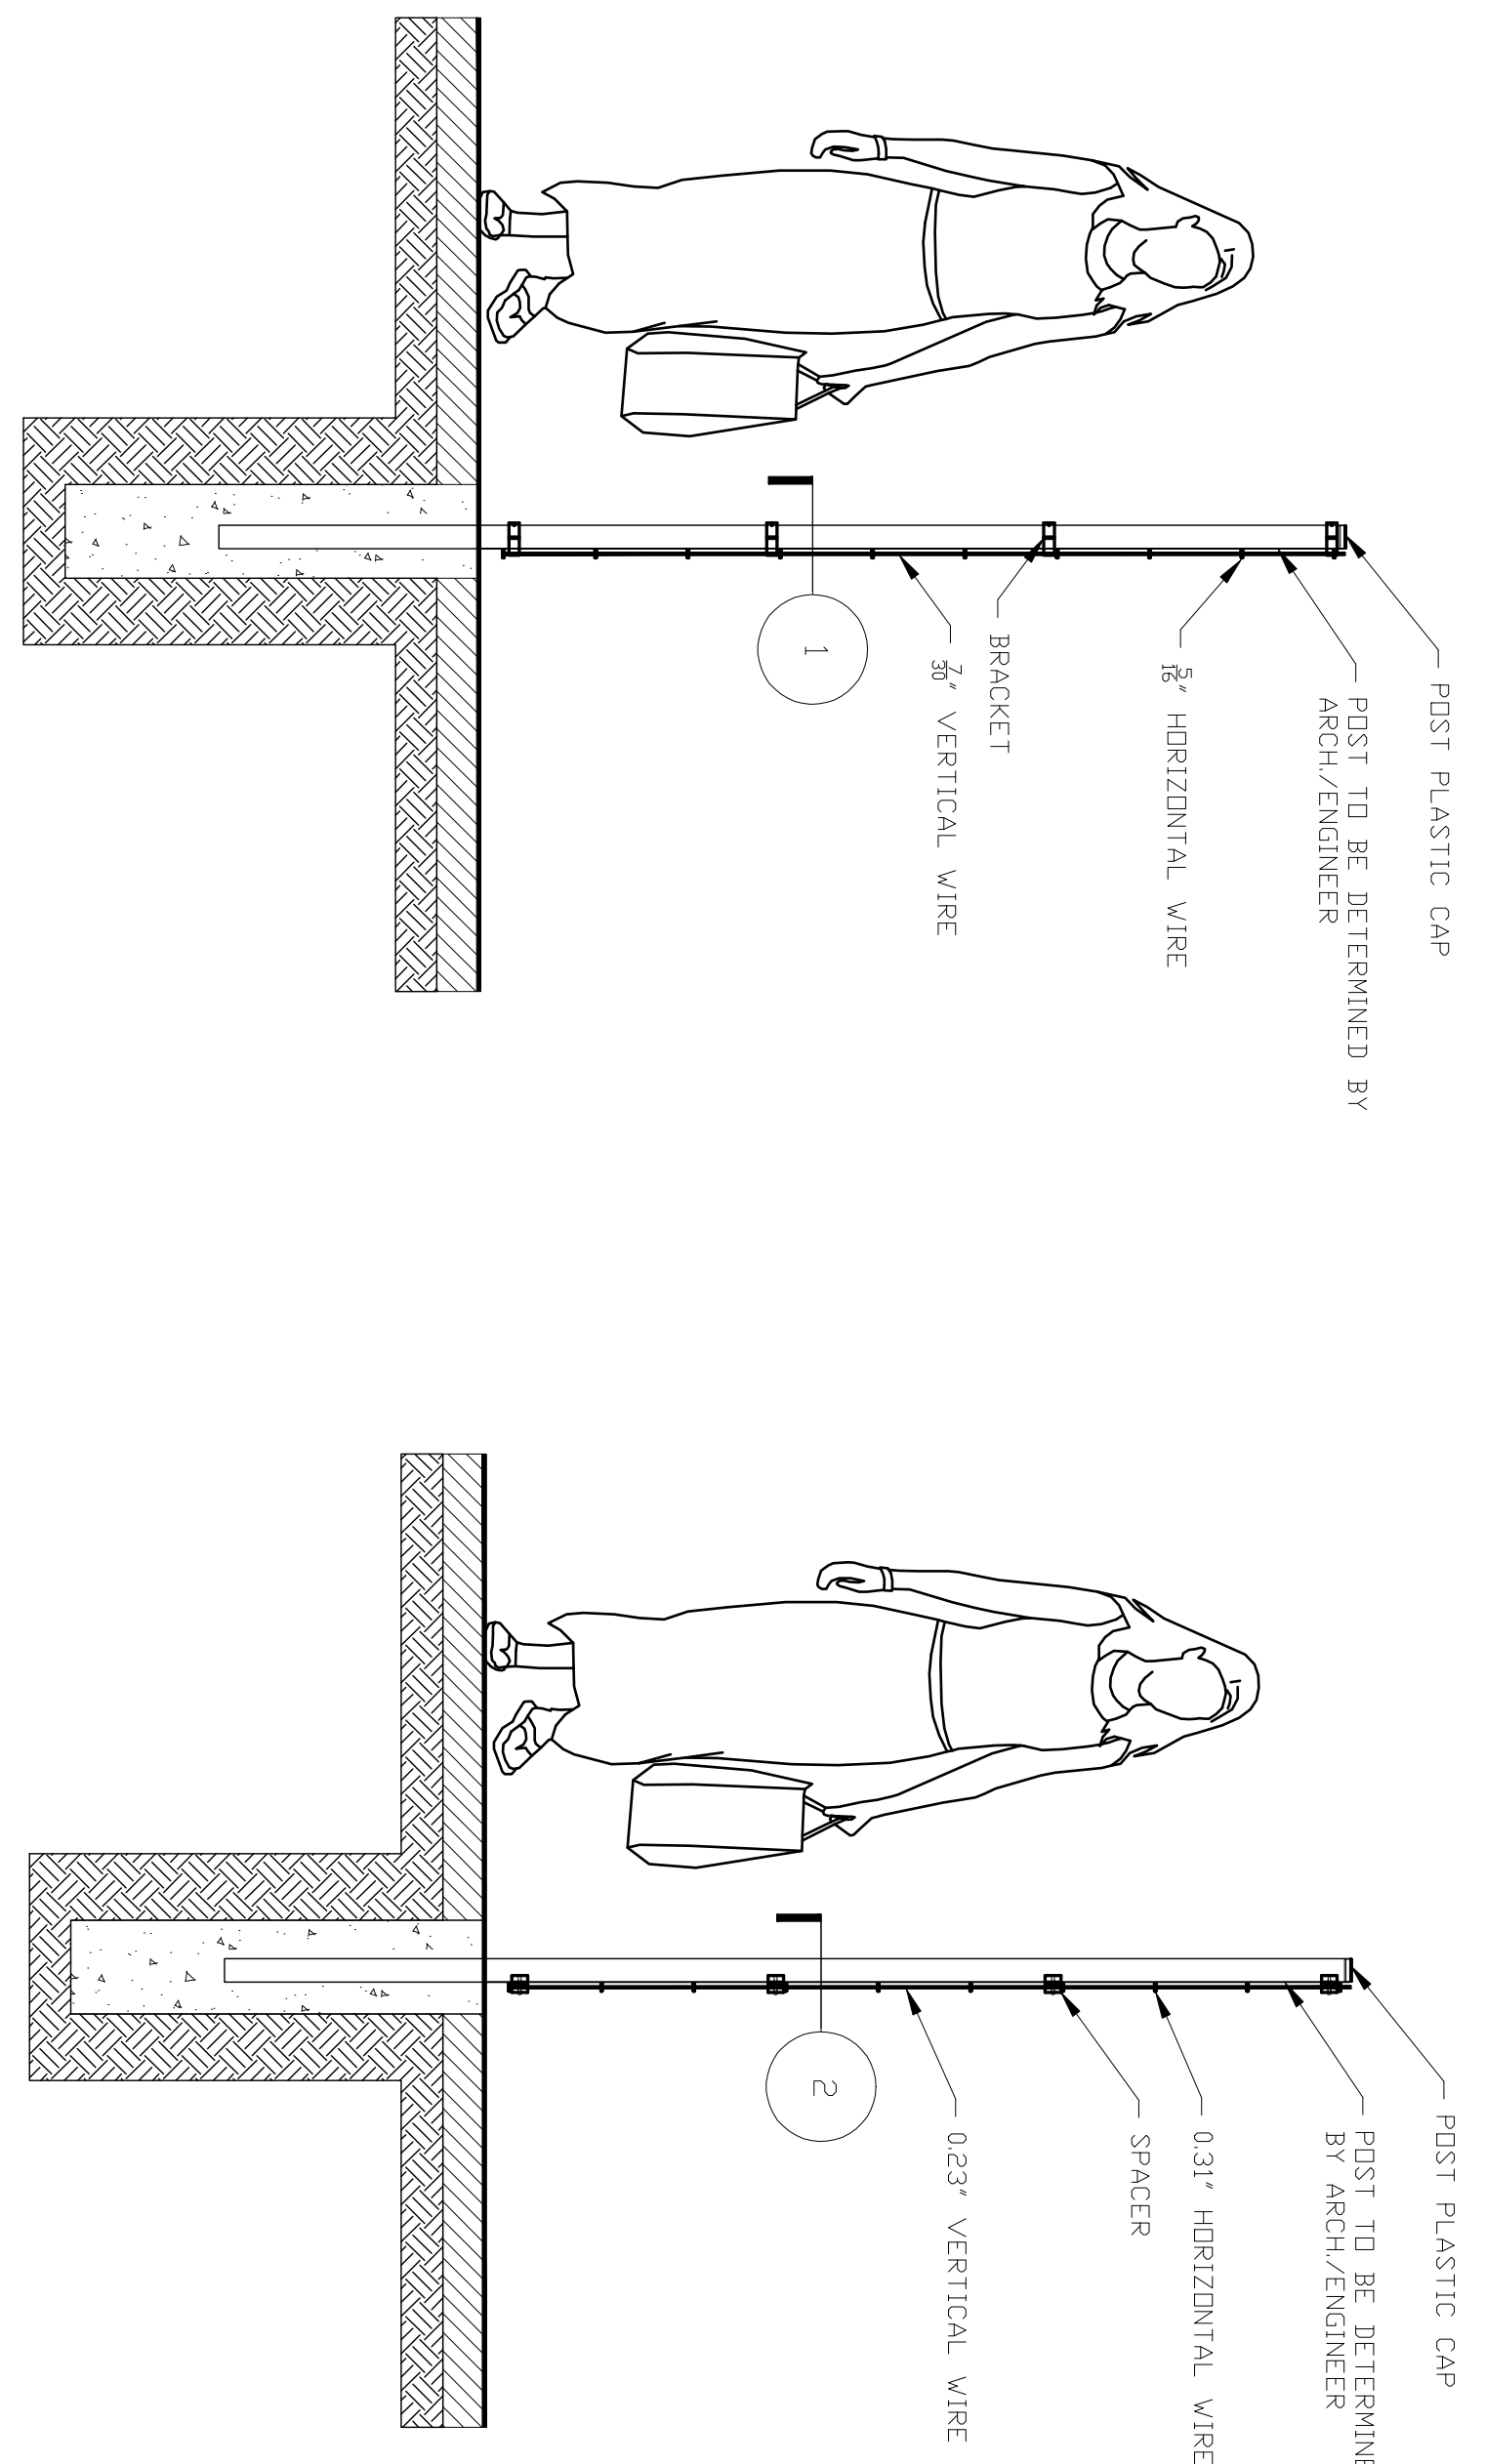


- VALUES SHOWN ARE NOMINAL AND NOT TO BE USED FOR INSTALLATION PURPOSES.
- DRAWINGS ARE NOT TO SCALE.
- CHECK WITH LOCAL BUILDING CODES AND OBTAIN ALL NECESSARY BUILDING PERMITS.
- THESE ARE BASIC AND GENERAL SPECIFICATIONS AND DO NOT COVER ALL POSSIBLE INSTALLATION SCENARIOS.
- PANEL MAY BE INSTALLED WITH THE TINES POINTING UP OR DOWN.

DMF CONTEMPO PANEL SPECIFICATIONS		
	TOLERANCE	SPECIFICATION
HORIZONTAL WIRE DIAMETER	±0.0019"/±0.05mm	ASTM A-510
VERTICAL WIRE DIAMETER	±0.0019"/±0.05mm	ASTM A-510
TENSILE STRENGTH	80 ksi	ASTM A-510
ZINC COATING	0.32 oz/H ²	ASTM A-641
POWDER COATING THICKNESS	TOIC FREE/VOC FREE	ASTM D-7091

DMF POST SPECIFICATIONS		
POST SIZE	DIMENSION	SPECIFICATION
POST GAUGE	3"x3"	ASTM A-513
TENSILE STRENGTH	11	ASTM A-500
POST ZINC COATING	44945 lbs/in ²	ASTM A-653 TABLE 1 (G90=Z275)
YIELD STRENGTH	0.9oz/H ²	ASTM A-500
POST CAP	32997 lbs/in ²	ASTM A-500
HARDWARE CLAMPS	PLASTIC INJECTION FOR 3"x3" POST	POLYPROPYLENE
POWDER COATING THICKNESS	CLAM SHELL 100 MICRONS	ELECTROGALVANIZED STEEL TOIC FREE/VOC FREE
		ASTM D-7091

DMF POST SPECIFICATIONS (ALTERNATE)		
POST SIZE	DIMENSION	SPECIFICATION
POST GAUGE	3"x3"	ASTM A-513
TENSILE STRENGTH	11	ASTM A-500
POST ZINC COATING	44945 lbs/in ²	ASTM A-653 TABLE 1 (G90=Z275)
YIELD STRENGTH	0.9oz/H ²	ASTM A-500
POST CAP	32997 lbs/in ²	ASTM A-500
HARDWARE CLAMPS	PLASTIC INJECTION FOR 3"x3" POST	POLYPROPYLENE
POWDER COATING THICKNESS	UNIVERSAL CLAMP 100 MICRONS	ELECTROGALVANIZED STEEL TOIC FREE/VOC FREE
		ASTM D-7091

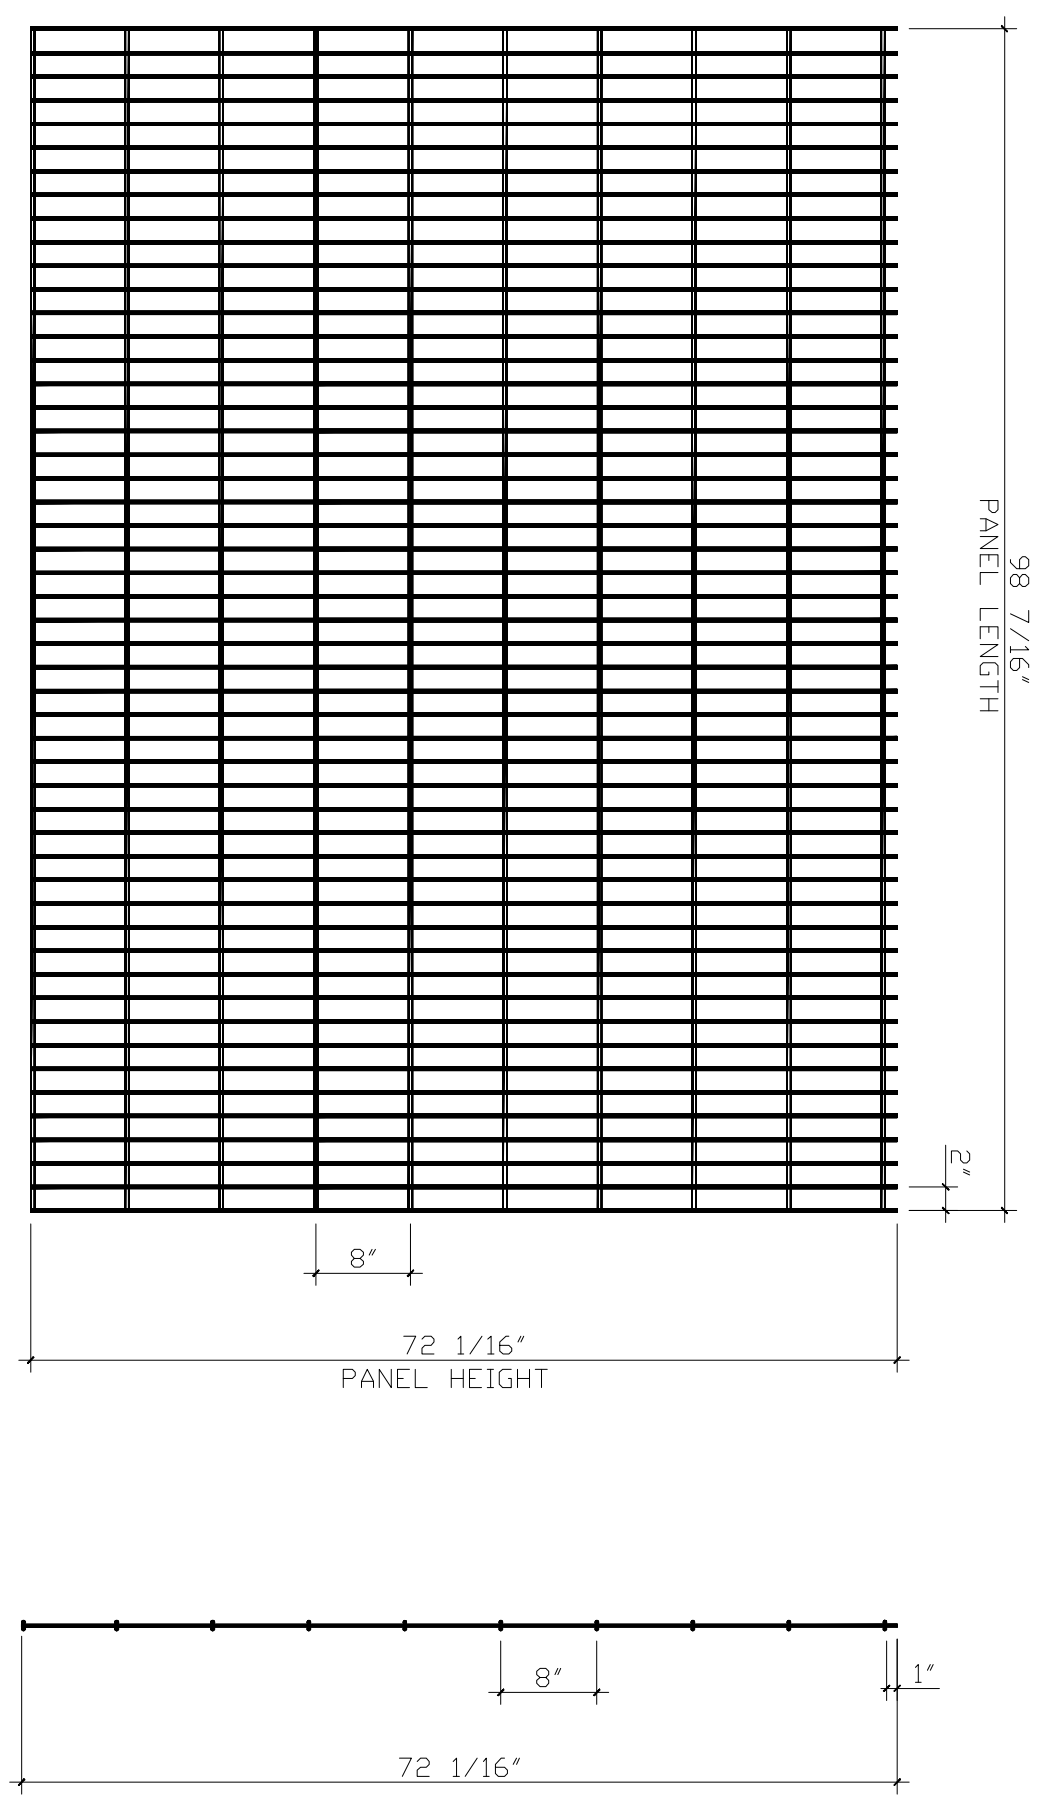

DRAWINGS BY:
V/P & ASSOCIATES, INC.
202 S. 28ND ST.
TAMPA, FL 33605
PH: 813-247-3835
FAX: 813-247-4305

DATE: APRIL, 2018	
PROJECT NAME:	GENERAL SPECS
CUSTOMER:	DESIGN MASTER FENCE

DMF - CONTEMPO 6'-0"
ELEVATIONS/SECTIONS

