
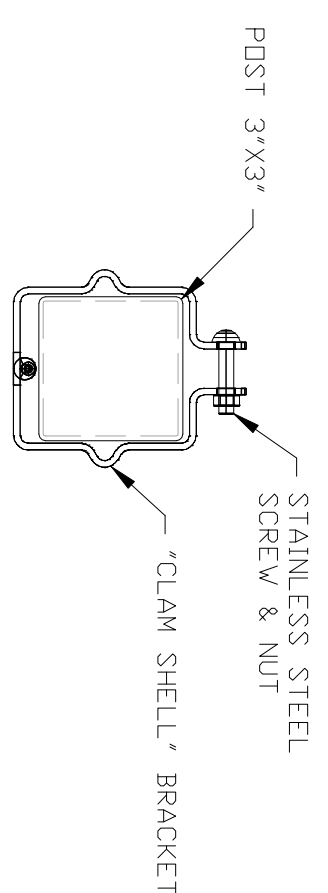


- VALUES SHOWN ARE NOMINAL AND NOT TO BE USED FOR INSTALLATION PURPOSES.
- DRAWINGS ARE NOT TO SCALE.
- CHECK WITH LOCAL BUILDING CODES AND OBTAIN ALL NECESSARY BUILDING PERMITS.
- THESE ARE BASIC AND GENERAL SPECIFICATIONS AND DO NOT COVER ALL POSSIBLE INSTALLATION SCENARIOS.
- PANEL MAY BE INSTALLED WITH THE TINES POINTING UP OR DOWN.



DMF CONTEMPO PANEL SPECIFICATIONS		
HORIZONTAL WIRE DIAMETER	TOLERANCE	SPECIFICATION
0.31"/8mm.	±0.0019"/±0.03mm.	ASTM A-510
VERTICAL WIRE DIAMETER	±0.0019"/±0.03mm.	ASTM A-510
TENSILE STRENGTH	80 ksi	
ZINC COATING	0.32 oz/ft ²	ASTM A-641
POWDER COATING THICKNESS	TIG FREE/VOC FREE	ASTM D-7091

DMF POST SPECIFICATIONS		
POST SIZE	DIMENSION	SPECIFICATION
POST GAUGE	3"x3"	ASTM A-513
TENSILE STRENGTH	11	
POST ZINC COATING	44945 lbs/ft ²	ASTM A-500
YIELD STRENGTH	0.9oz/ft ²	ASTM A-653 TABLE 1 (G90=Z275)
POST CAP	32997 lbs/ft ²	ASTM A-500
HARDWARE CLAMPS	PLASTIC INJECTION FOR 3"x3" POST	POLYPROPYLENE
POWDER COATING THICKNESS	CLAM SHELL 100 MICRONS	ELECTROGALVANIZED STEEL TIG FREE/VOC FREE
		ASTM D-7091

DMF POST SPECIFICATIONS (ALTERNATE)		
POST SIZE	DIMENSION	SPECIFICATION
POST GAUGE	3"x3"	ASTM A-513
TENSILE STRENGTH	11	ASTM A-500
POST ZINC COATING	0.9oz/ft ²	ASTM A-653 TABLE 1 (G90=Z275)
YIELD STRENGTH	32997 lbs/ft ²	ASTM A-500
POST CAP	PLASTIC INJECTION FOR 3"x3" POST	POLYPROPYLENE
HARDWARE CLAMPS	CLAM SHELL 100 MICRONS	ELECTROGALVANIZED STEEL TIG FREE/VOC FREE
POWDER COATING THICKNESS		ASTM D-7091

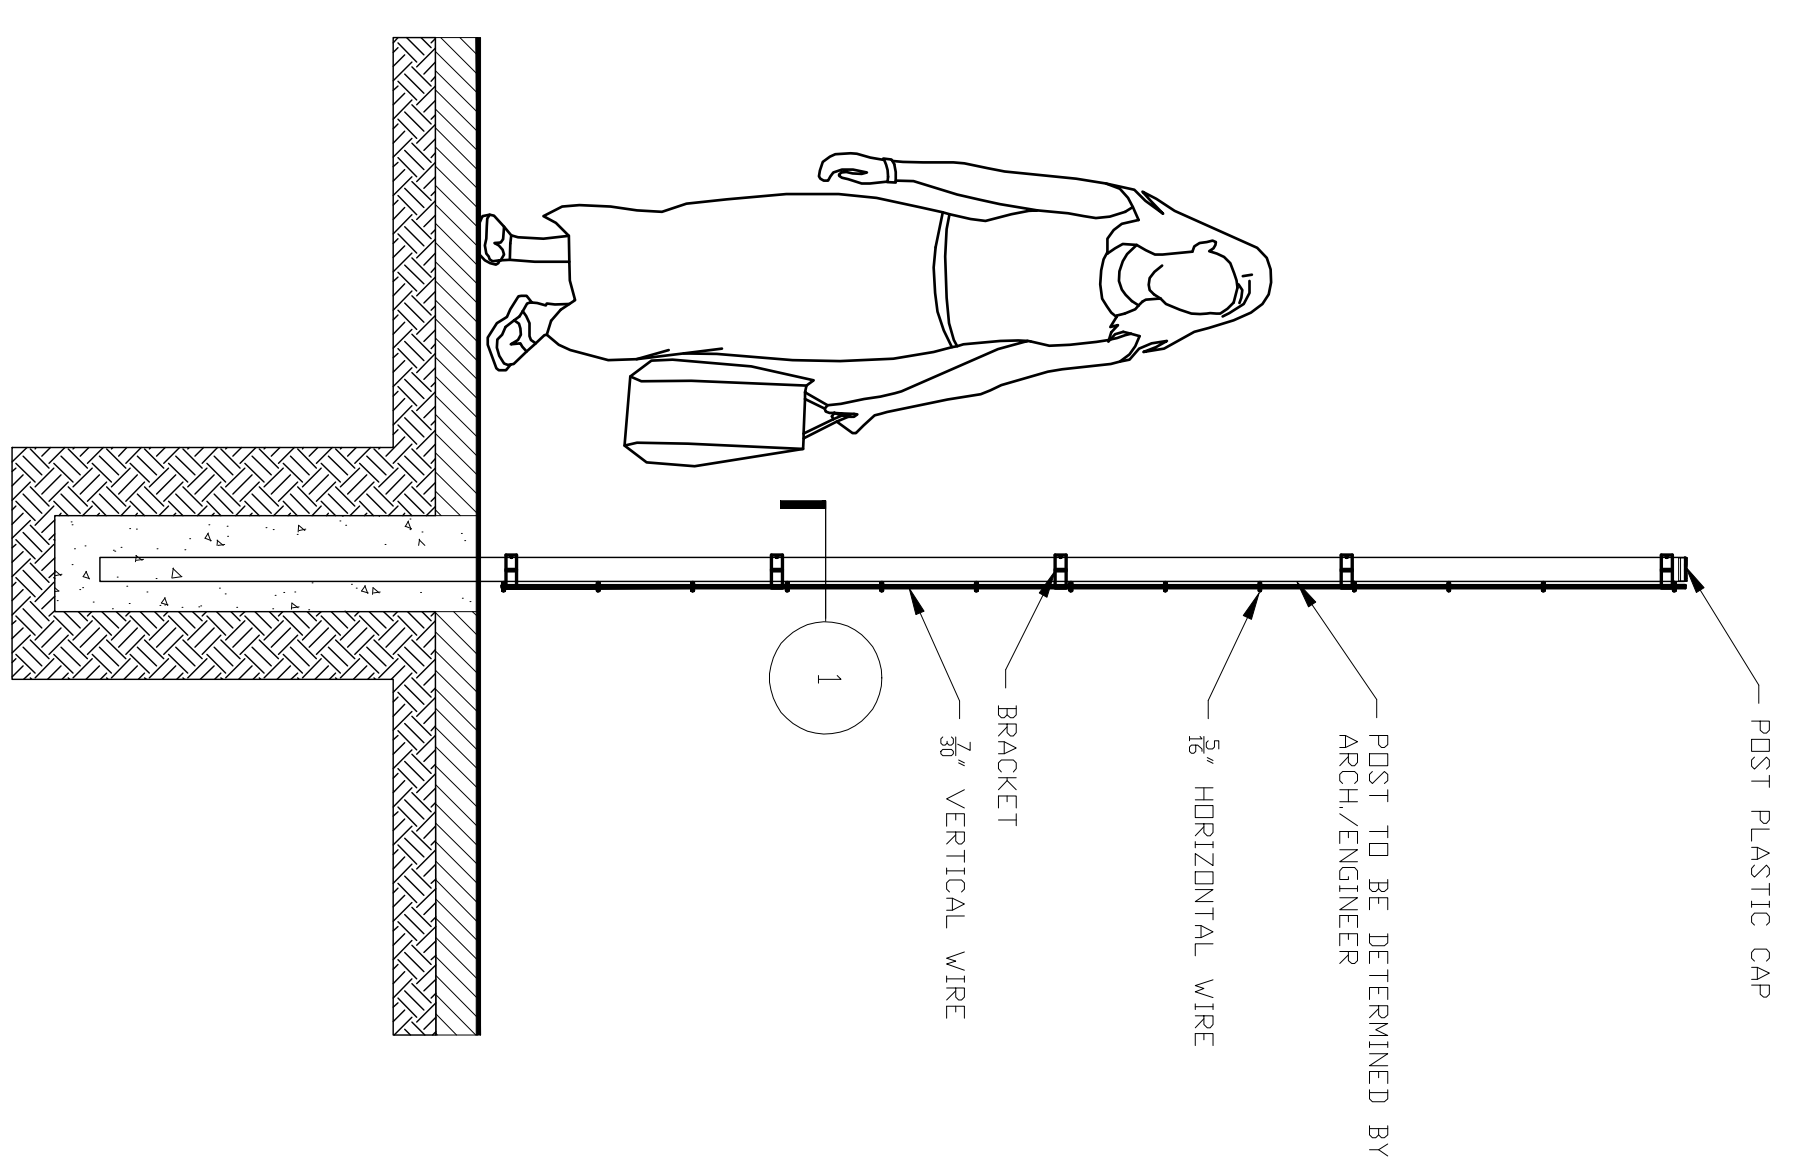

SECTION 1 - "CLAM SHELL" BRACKET

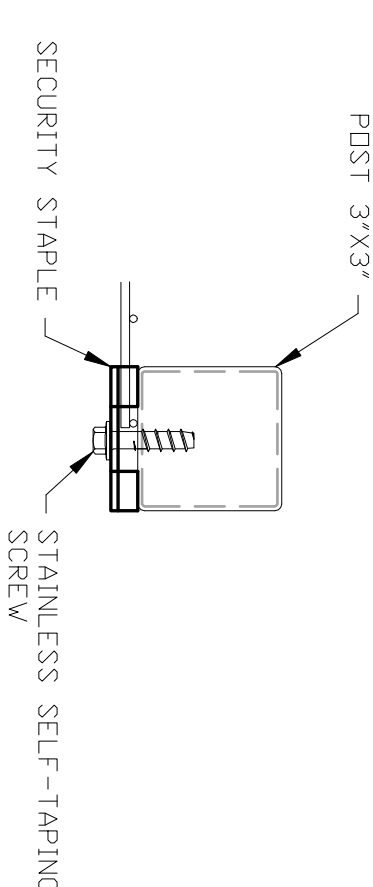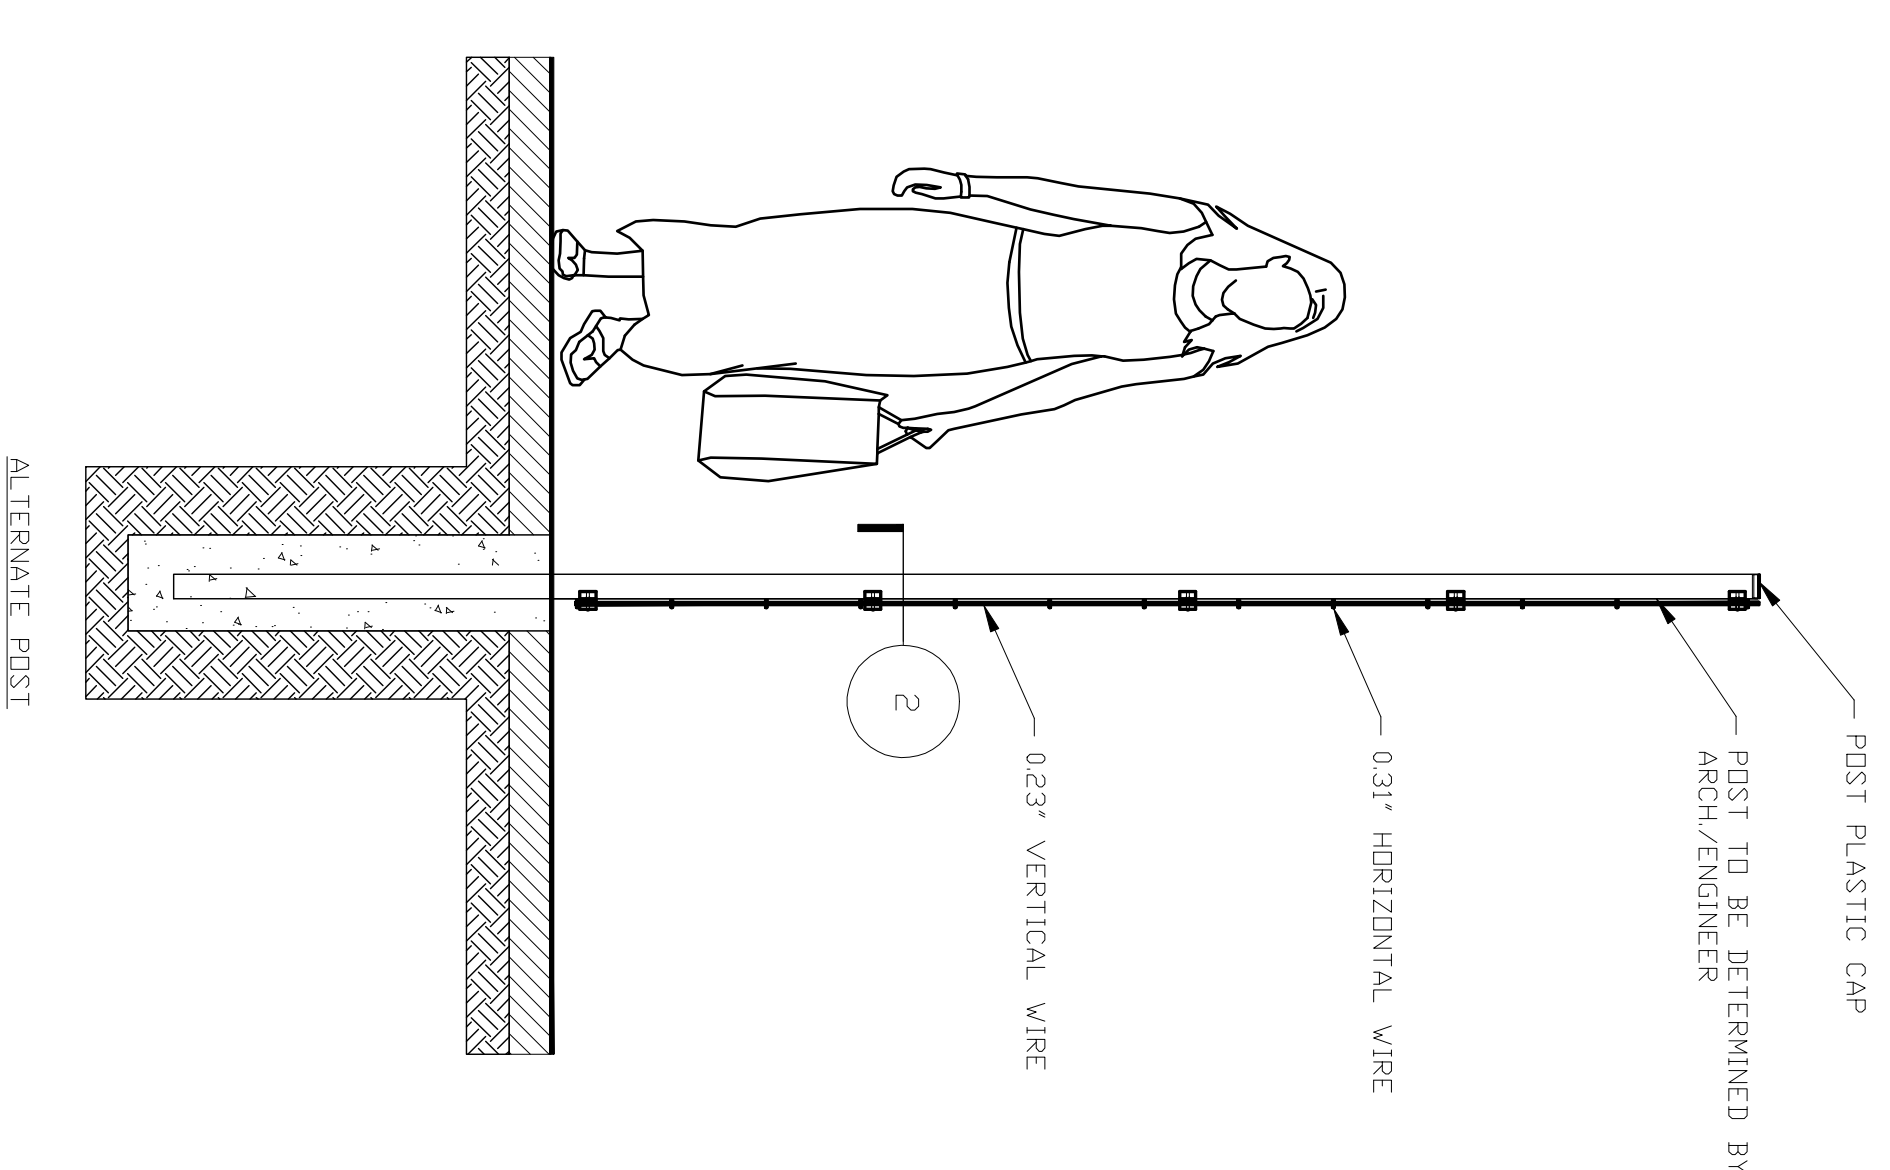


SECTION 2 - "UNIVERSAL CLAMP"

DRAWINGS BY:
 VP & ASSOCIATES, INC.
 200 S. EDWARDS ST
 TAMPA, FL 33605
 PH: 813-247-3835
 FAX: 813-247-4305

DATE: APRIL, 2018

DMF - CONTEMPO 8'-0"
 ELEVATIONS/SECTIONS

PROJECT NAME: GENERAL SPECS
 CUSTOMER: DESIGN MASTER FENCE

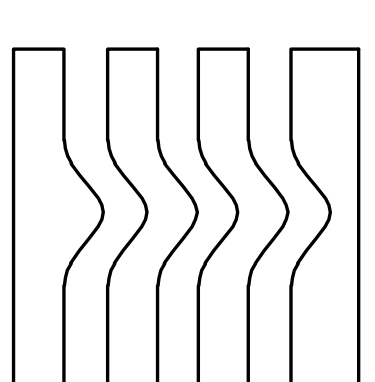

Designmaster™
 FENCING SYSTEM